





BATTERY MODULE

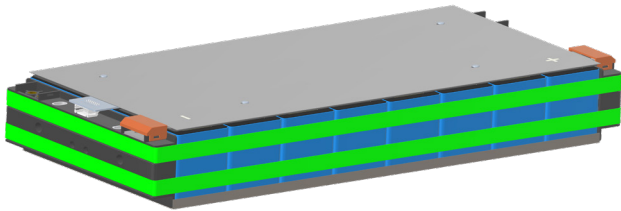

Safe and reliable, with its own fuse function.

Modular and customizable design.

Residential, industrial and commercial energy storage.

Adapts to a variety of thermal management solutions.

Adapts to different working environments.

High-strength and durable structure.

Slim design to meet the needs of more demanding applications.

Product Code	9100X0017892	9100X0017893	9100X0017894
Nominal Voltage		25.6V	19.2V
Nominal Capacity	85Ah	100Ah	300Ah
Configuration		1P8S	2P6S
Charging Voltage		29.2V	21.9V
Charging Current	85A	100A	300A
Discharge Current	85A	100A	300A
Factory Voltage		25.2V-26.8V	18.9V-20.1V
Self-discharge Rate		≤ 2.5% / month	
Charging Temperature		0°C - +65°C	
Discharging Temperature		-20°C - +65°C	
Size		486 x 221.6 x 83.5mm	705 x 221.6 x 125mm